






P43 with optional modern door trim, air grille, trail rider slate inlay and black heat shields with brushed stainless accent and log set

Harman P-Series stoves are a true testament to engineering excellence and heating performance. These customizable units create a striking statement in your living space, blending clean lines and mechanical flair with the elegant design of your home. Multiple sizes allow for seamless integration into any room, while efficiently heating your space.

Key Technologies

 **ESP Temperature Control** an exhaust sensing probe system delivers precise heating control and constantly monitors and adjusts heat output to maintain set room temperatures

 **PelletPro™ Technology** makes it possible to burn any grade of pellet fuel with maximum heat and efficiency. A bottom-up feed system burns each pellet completely and allows for 24-hour heating

 **EPA Certified** be kind to the environment with industry leading technology and high efficiency



P43 shown with optional ceramic log set



P61 shown with optional modern door trim, air grille and deer slate inlay and log set








P68 shown with optional leaf door trim, air grille, trail riders slate inlay and log set

	P43	P61	P68
Heating Capacity¹	800-2,400 sq ft	1,300-3,500 sq ft	1,500-3,900 sq ft
BTU/hr Input²	23,900-45,200	21,400-60,700	20,200-67,600
Efficiency³	82.7% LHV/76.7% HHV	85% LHV/79% HHV	85% LHV/79.5% HHV
Emissions	1.82 g/hr	1.5 g/hr	1.4 g/hr
Hopper Capacity	50 lb	72 lb	76 lb
with optional extension	105 lb	132 lb	136 lb
Feed Rate	4.9lb/hr max	6.6lb/hr max	7.8lb/hr max
Venting Size	3"	3"	3"
Weight	213 lb	247 lb	259 lb

Specifications

	A	B	C	D	E	F	G	H	Minimum Floor Protection
P68	23-1/2" (597mm)	37-1/2" (953mm)	10" (254mm)	29-3/8" (746mm)	2" (51mm)	14" (356mm) w/shield 20" (508mm) w/o shield	36" (914mm)	9" (228mm) w/shield 13" (330mm) w/o shield	25-3/16"W x 27-3/4"D (640mm x 705mm)
P61	23-1/2" (597mm)	36-1/2" (927mm)	10" (254mm)	29-3/8" (746mm)	2" (51mm)	12" (305mm) w/shield 18" (457mm) w/o shield	36" (914mm)	9" (228mm) w/shield 13" (330mm) w/o shield	25-1/8"W x 27-3/4"D (638mm x 705mm)
P43	22" (559mm)	36-1/2" (927mm)	10" (254mm)	28-5/16" (719mm)	2" (51mm)	10" (254mm) w/shield 16" (406mm) w/o shield	36" (914mm)	9" (228mm) w/ or w/o shield	25-7/16"W x 26-3/4"D (646mm x 679mm)

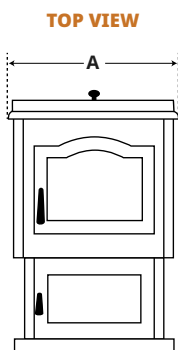

Options

Trim Kits - Include door trim, ash lip and ash door trim. Available in brushed stainless steel.



P43/P61 Leaf



P43/P61/P68 Modern



P68 Leaf

Air Grille - available in brushed stainless steel.



Side Heat Shields



Matte Black with Stainless Steel accent



Matte Black

Hopper Extension



55lb hopper extension (P43)
60lb hopper extension (P61 & P68)

Harman Protect Cast Iron Hearth Pad



Ceramic Log Kit



Ash Door Inlays



Deer Slate



Trail Riders Slate

Scan to learn more about our pellet stoves



For full warranty details, visit www.forgenflame.com. ¹See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. ²EPA tested input. ³Weighted average LHV (Low Heating Value) efficiency. HHV (High Heat Value) efficiency used to qualify products for Tax Credit beginning in 2023.

Actual product appearance, including flame, may differ from image. Product specifications and pricing subject to change without notice. The images and descriptions in this brochure are provided to assist you in product selection only. Fuel density and pellet shape may affect hopper capacity. BTUs may vary depending on type of fuel used. Refer to installation manual for complete clearance requirements and specifications. Appliance surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.forgenflame.com/pages/fireplace-safety.

FORGENFLAME.COM

