

# EVERGREEN™ NEXGEN-HYBRID™ WOOD BURNING STOVE



**THIS MODEL QUALIFIES FOR THE 30% USA TAX CREDIT  
ON THE PURCHASE, VENTING AND INSTALLATION COSTS**  
PLEASE CONSULT WITH YOUR TAX ADVISOR TO CONFIRM YOUR ELIGIBILITY FOR THIS TAX CREDIT

## NEW DESIGN, LOWER EMISSIONS, HIGHER EFFICIENCY

The newly designed mid-sized Evergreen NexGen-Hybrid™ Wood Stove hits the mark on performance, function and design. NexGen-Hybrid™ wood stoves are the cleanest burning, most efficient wood stoves available today!

These are not your typical catalytic wood stoves. NexGen-Hybrid™ is a combination of the two greatest wood burning technologies we've ever created: Our patented, award-winning Hybrid-Fyre® technology and our high performance NexGen-Fyre™ technology. This advanced system drafts and operates like a super clean non-catalytic stove, while burning less wood to generate a greater heat output like a catalytic stove. The results are lower emissions, higher efficiencies, and longer burn times.



# EVERGREEN™ NEXGEN-HYBRID™ STOVE

## SPECIFICATIONS

Emissions:	1.2 Grams Per Hour	Construction:	5/16" to 3/16" Steel Plate
Heating Capacity*:	Up to 2,000 Square Feet	Efficiency**:	77.3% HHV (High Heat Value)
BTU Range Cord Wood:	12,772 to 70,720 BTUs Per Hour**	Glass Area:	183 sq. in (16-7/8" W x 10-7/8" T)
BTU Range Crib Wood:	10,768 to 37,113 BTUs Per Hour	Maximum Burn Time:	Up to 10 Hours
Real World BTUs:	<i>EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your insert to maintain your desired comfort level. By the simple process of loading your fireplace insert with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.</i>	Firebox Size:	2.18 Cubic Feet
		Maximum Log Size:	20-1/2"
		Bypass Damper:	Yes
		Weight:	Legs: 505 lbs, Pedestal: 530 lbs

\* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

\*\*This model was tested for efficiency using method B415.1-10.

## OPTIONS



- 400 CFM Convection Fan
- Outside Air Kit
- **GREEN START™** Igniter

## GREEN START™ PUSH-BUTTON STARTUP. THE GREATEST WOOD STOVE OPTION EVER!



With a push of the GreenStart® button, super-heated air (1400°F) starts your Evergreen NexGen-Hybrid™ in a New York minute. You can also use the GreenStart® Igniter when adding new wood or refreshing your fire after an overnight burn. Your fireplace door stays closed during startups; no more smoky starts, no more slow starts. Anyone can do it!

## CLEARANCES & HEARTH PROTECTION

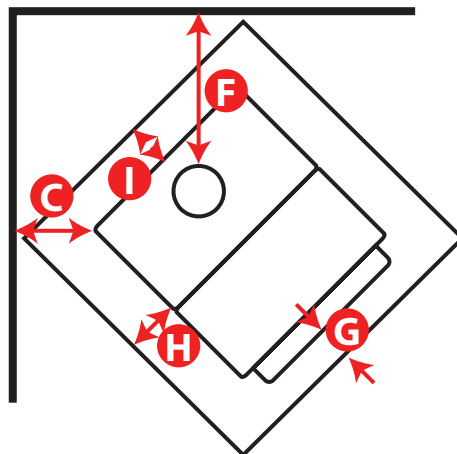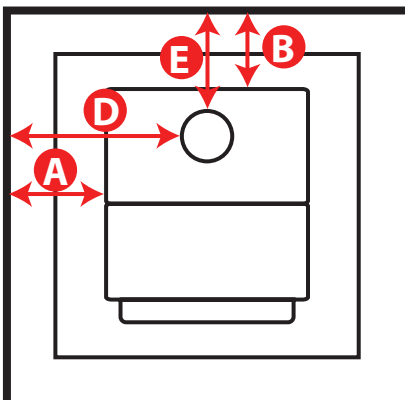

	Single Wall Connector	Double Wall Connector
A	12"	11"
B	19"	11"
C	11-5/8"	4"
D	22-1/2"	21"
E	21"	12-1/2"
F	21"	13-1/2"
G	16" USA, 18" CAN	16" USA, 18" CAN
H	6" USA, 8" CAN	6" USA, 8" CAN
I	6" USA, 8" CAN	6" USA, 8" CAN